

EPC/LPC99A Controller

ADVANTAGE:

Reliable versatile controller for use with Niika photoelectric or ultrasonic sensors.

Capable of line or edge sensing over a wide range of materials. Very easy to set up and calibrate with auto centre function and remote mounting capability. 3 functions for Auto/Manual/Centering.

Model	EPC/LPC99A Controls
Power	AC100V-240V 50/60HZ
Methods	PWM
Temperature	0°C~50°C
Weight	3kg
Material	ABS
Size	(D)182m/mx(W)246m/mx(H)156m/m




Linear Actuators

Electromechanical actuators with built in end of stroke and centre stroke sensors.

Electrical DC Servo actuator with powerful thrust and fast response.

Durable electrical construction without hydraulic piping, can be cleaned easily.

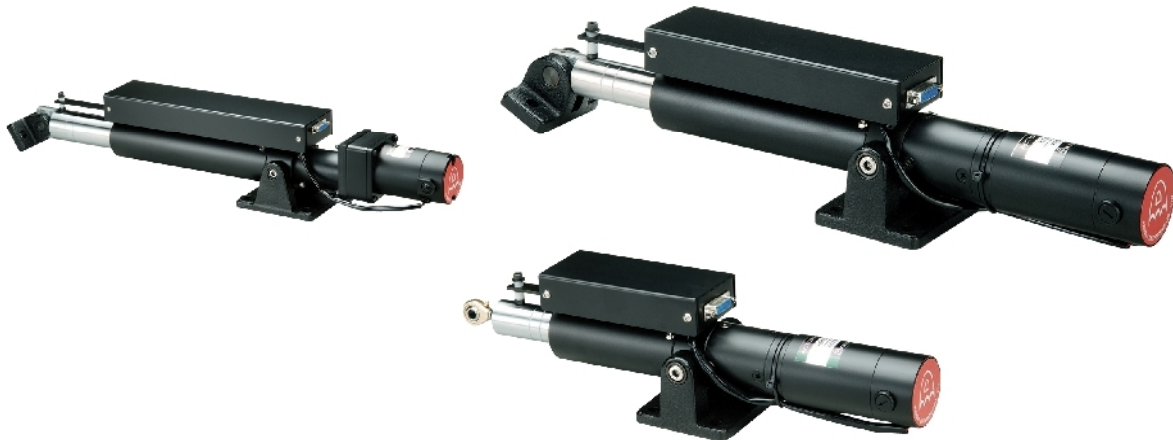

TYPE	THRUSTER	STROKE	MAX STAND WEIGHT	MAX ACTUATOR SPEED	MAX LINE SPEED	Weight
KC80-20	100kg	80m/m	600 KGS	20mm/s	300 MTRS/M	5.5kg
KC150-20	150kg	150m/m	1500 KGS	20mm/s	300 MTRS/M	12.5kg