




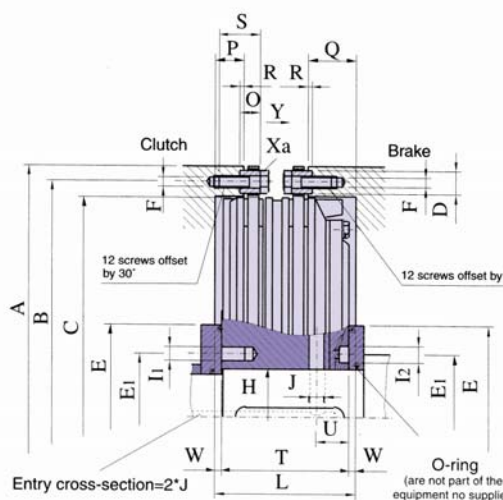

PCCU-TT

With 24-point plate suspension





Adequate ventilation space should be provided between the suspension screws. Additional ventilation can be achieved through fixing of ventilation fans on the clutch plate. Details will be given on request.

To allow fitting and removal of the screws, two spaces are provided in the brake plate offset by 180° (see view Y) Minimum diameter required for the dismantling of the plates is approx. 1.55x ϕ .

PCCU-SS

With friction blocks for machines with high level of load changes in continuous operation

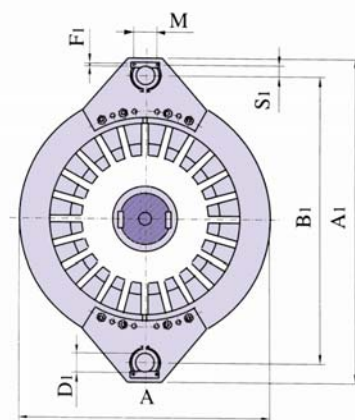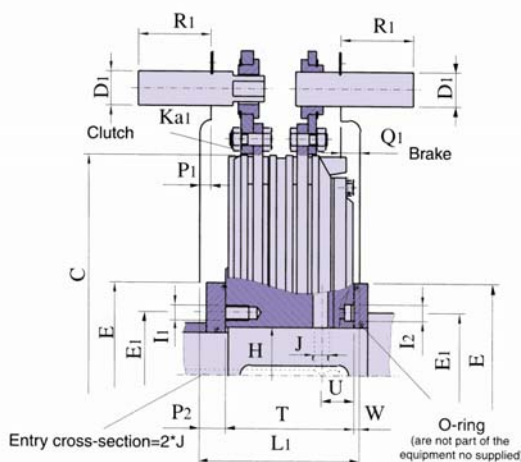

PCCU-SL

With friction blocks for machines with high level of load changes in continuous operation

In the bore 2 keyways offset by 180°
2 air inlets (T) offset by 180° and offset relative to the keyways by 90°

