

● Product features :

- Adoption PWM mode control output provides accurate of voltage.
- Electron style design with small size, lights weights, easy of installation.
- Has voltage control, current limit, current limit outdated trip, short circuit trip, error to tie point output, fuse break etc preservation and indicated.
- Source voltages can select 110VAC or 220VAC.
- Has close style and open style product can choice.
 - OPEN : Device in distributor inner, external VR setting or linking up signal.
 - CLOSE : Device in face or hang machine side, direct of panel operates.
- Tension meter show in voltage and can change HI (24VDC) or LOW (13VDC) control.
- The design of new mode which improves tradition design shortcoming, quality more equability addition merit promoted.




CLOSE

OPEN

OPEN

CLOSE

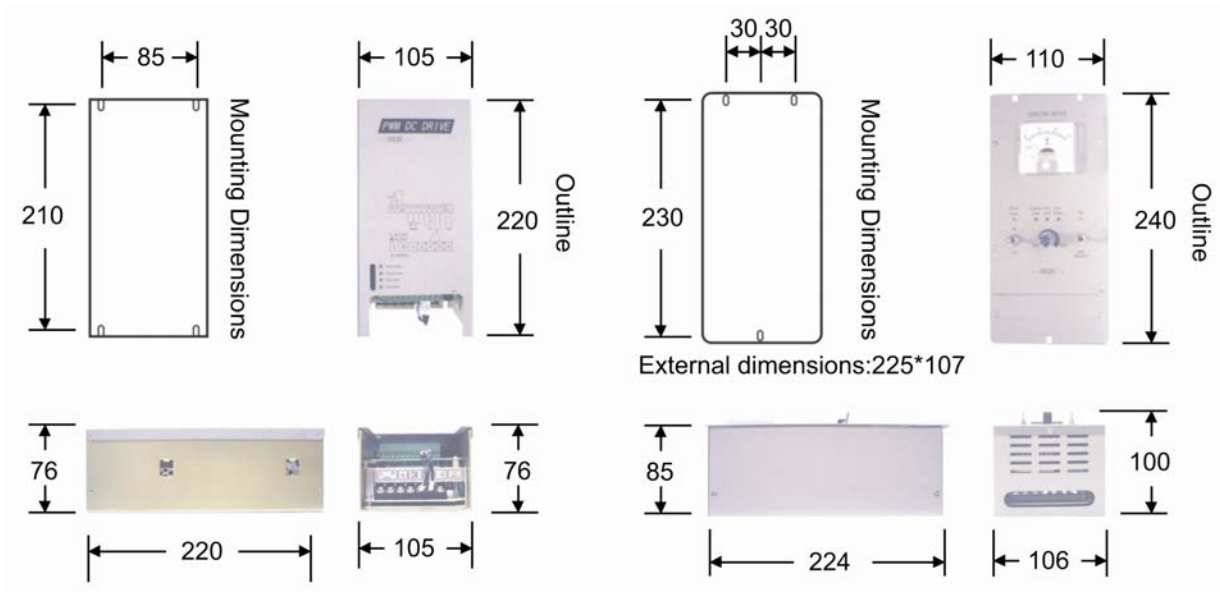

Item	Open	Close
Series	WT-PDC05-□V04-0 □ = 1(110V)or2(220V)	WT-PDC05-□V04-0 □ = 1(110V)or2(220V)
Dimensions	220L*105W*76H Units: mm	240L*116W*100H Units: mm
Weights	1.2Kg	1.8Kg
Input	1Φ 110V AC 1.9A 50/60Hz 220V AC 0.8A	
Output	HI : 24V DC LOW : 13V DC MAX : 4A	
Alarm rating contact	30V AC : 2A 125V AC : 0.6A	